


# Coordination chart for Kearney type QA with type X fuse links

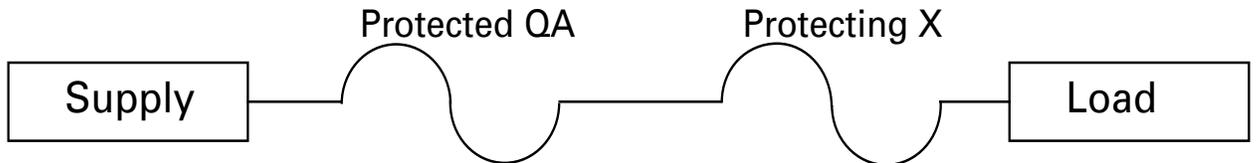

Protecting fuse type X	Protected fuse ampere rating type QA													
	10	15	20	25	30	40	50	60	75	100	125	150	175	200
1/3 - 3/4	225	330	550	740	900	1150	1500	1800	2700	3400	4200	5300	6500	8000
1 - 2	170	280	520	700	900	1150	1500	1800	2700	3400	4200	5300	6500	8000
2 1/2		80	400	600	800	1100	1450	1800	2700	3400	4200	5300	6500	8000
2 3/4			58	140	540	920	1350	1750	2600	3400	4200	5300	6500	8000
3 1/2				55	350	820	1250	1700	2500	3400	4200	5300	6500	8000
4					60	500	1100	1600	2500	3400	4200	5300	6500	8000
5 1/2 - 10							110	750	1300	2300	3100	4200	5300	8000
15								105	210	1800	2800	3900	5000	8000

**Notes:** This chart applies to Kearney Type QA fuse links coordinated with Type X fuse links. The table is applicable for both Fit-All cable fuse links and Trip-O-Link fuse links where the former is used in open and enclosed cutouts and the latter in open link cutouts. The chart is recommended for general use under usual conditions of service, subject to the general rule that the ratio of fuse link sizes should be as large as circumstances permit.

Intentionally left blank

**Eaton**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com

**Eaton's Power Systems Division**  
2300 Badger Drive  
Waukesha, WI 53188  
United States  
Eaton.com/cooperpowerseries

© 2017 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. TD325012EN  
October 2017

Eaton is a registered trademark.

All trademarks are property  
of their respective owners.

For Eaton's Cooper Power series product  
information  
call 1-877-277-4636 or visit:  
[www.eaton.com/cooperpowerseries](http://www.eaton.com/cooperpowerseries).