


# Coordination chart for Kearney type T fuse links

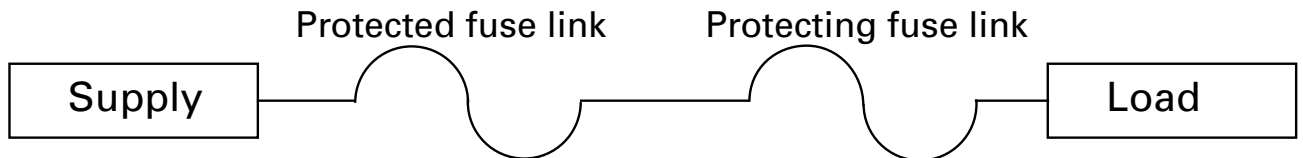

Protecting fuse link ampere rating	Protected fuse link ampere rating														
	6	8	10	12	15	20	25	30	40	50	65	80	100	140	200
Maximum R.M.S. amperes for safe coordination															
1, 2, or 3	225	360	550	780	1050	1400	1750	2250	2900	3600	4550	5900	7100	10,000	10,000
6		140	400	690	990	1350	1750	2250	2900	3600	4550	5900	7100	10,000	10,000
8			220	560	900	1300	1650	2250	2900	3600	4550	5900	7100	10,000	10,000
10				300	710	1200	1600	2200	2800	3600	4550	5900	7100	10,000	10,000
12					400	910	1450	2000	2700	3500	4550	5900	7100	10,000	10,000
15							1200	1800	2550	3400	4500	5900	7100	10,000	10,000
20								1500	2350	3200	4300	5500	7000	10,000	10,000
25									1950	3000	4050	5400	7000	10,000	10,000
30										2500	3700	5050	6900	10,000	10,000
40											3000	4500	6400	10,000	10,000
50												3700	5900	10,000	10,000
65													4700	9600	10,000
80														8800	10,000
100														6000	10,000
140															10,000

**Notes:** This chart applies to Kearney Type T fuse links used in Kearney open and enclosed cutouts. It is recommended for general use under usual conditions of service, subject to the general rule that the ratio of fuse link sizes should be used large as circumstances permit.

Intentionally left blank

**Eaton**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com

**Eaton's Power Systems Division**  
2300 Badger Drive  
Waukesha, WI 53188  
United States  
Eaton.com/cooperpowerseries

© 2017 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. TD325007EN  
October 2017

Eaton is a registered trademark.

All trademarks are property  
of their respective owners.

For Eaton's Cooper Power series product  
information  
call 1-877-277-4636 or visit:  
[www.eaton.com/cooperpowerseries](http://www.eaton.com/cooperpowerseries).