

Secondary Telephone Alarm and Signal Unit TWIN LED

Optical and acoustic call signalling

Overview

The optical and acoustic secondary alarm and signal unit is designed for application in industrial areas and is suitable for indoor and outdoor use.

The TWIN LED is a device suitable for connection to analogue public telephone networks and private branch exchanges.


When receiving a call signal to the respective telephone connection, the device submits optical and acoustic signals.

The signal light is available in 5 different cap colours.

The TWIN LED is a compact unit comprising power supply, telephone connection, strobe light, amplifier and loudspeaker. The bottom box is made of seawater-resistant cast aluminium coated with plastic. The loudspeaker is permanently mounted to the housing. The strobe light cap forms the housing cover and is made of polycarbonate.

Features



- Protection class IP 66
- Robust housing made of aluminium
- Very bright LED technique
- Extremely long life-cycle
- 4 loud melodies selectable
- Volume approx. 100 dB(A)

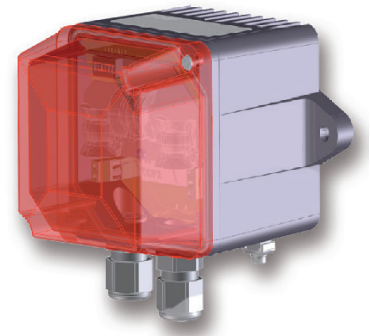

Technical Data

Operating modes	
Secondary Telephone Alarm and Signal unit	Selectable via slide-switch
Secondary telephone alarm	Signalling is performed when call from analogue telephone network arrives. A present power supply is required.
Signal unit	Signalling is performed at activation of power supply
Cable glands	2x M20 x 1.5 for lines \varnothing 6-13 mm
Terminal capacity	0.2-2.5 mm ² stranded wire 0.2-4.0 mm ² massive
Power supply	
Terminal designation	For AC supply: L, N, PE, additionally PA outside For DC supply: V+, V-, PA outside
Voltage supply AC	Overvoltage category CAT II (according to EN60664-1) Un= 115 VAC to 230 VAC / f = 50 Hz to 60 Hz Minimum admissible voltage = 100 VAC Maximum admissible voltage = 253 VAC
Voltage supply DC	24 VDC +10/-20 % Minimum admissible voltage = 19,2 VDC Maximum admissible voltage = 26,4 VDC
Operating time	Suitable for continuous operation
Telephone connection	
AC ringing voltage	24 V _{AC} ... 100 V _{AC}
Overlaid supply voltage	≤ 66 V _{DC}
Ringing frequency	20 Hz ... 68 Hz
Input impedance at 25 Hz	Z ≥ 16 kΩ @ 30 ... 70 VZ
Input impedance at 50 Hz	Z ≥ 8 kΩ @ 30 ... 70 VZ
Terminal designation	TCP1, TCP2
Acoustic signalling	
Acoustic signal	8 different settings (selectable via slide-switch)
Volume setting	4 loud melodies selectable 4 lower melodies selectable
Maximum volume	Approx. 101 dB(A) in 1 m distance
Minimum volume	Approx. 91 dB(A) in 1 m distance
Optical signalling	
Optical signalling unit	3 LEDs
Colour selection	Flashing interval
Flashing interval	80 ms
Flash frequency	1 Hz
Signalling interval after ringing (bridging of calling pause)	Approx. 4 s
Housing	die-cast Aluminium, surface powder-coated
Weight	Approx. 1.7 kg
Operating position	Any
Environmental conditions	
Operating temperature	-40 °C bis +65 °C
Transport and storage temperature	-40 °C to +85 °C according to IEC60721
Protection class	IP 66 according to EN 60529
Category	I (PE connection available)
Connection	
Telephone network	Connect polarity-independent in parallel to telephone (TCP1, TCP2)
Supply network	Observe the polarity in DC networks. In AC networks, the outer conductor should be connected to L, the neutral conductor to N and the protective conductor to PE
Potential equalization	Must be connected in all models, even in case of Dc supply. The connector is situated on the outside of the housing.

General arrangement
all dimensions in mm

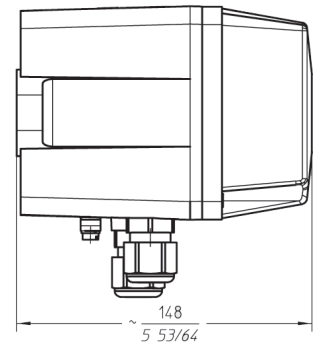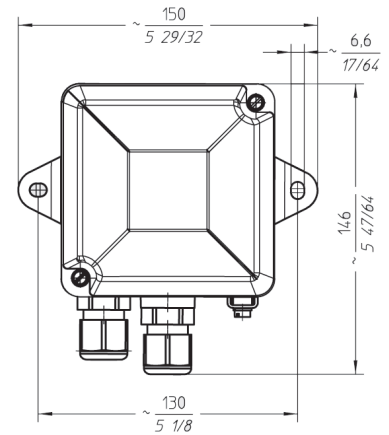

Order requirements

* The full article number is made up by appending the colour code to the article numbers given below.

Type	Designation	Model	Current consumption	Article number*
TWIN LED	Secondary Alarm and Signal Unit	100 to 253 V _{AC}	0,08 A/0,04 A	FHF 118 827 ..
TWIN LED	Secondary Alarm and Signal Unit	24 V _{DC}	0,15 A	FHF 118 823 ..

trans-parent	01
red	02
amber	03
green	04
blue	05