

# Sounders

Symphoni Voice +

## voice+



The Symphoni Voice+ is an ultra-low current sounder that can be supplied with up to 16 voice messages. Normally the unit is loaded with 3 commonly used messages. The sounder also has international tones available and a user selectable setting so that messages can be played without the use of a tone.

### Features

- Up to 16 messages
- 7 user selectable tones
- Low 4mA current consumption


### Benefits

- Fire, alert and general warning messages available
- Easy to configure at installation
- Maximises the number of units on a circuit

### Technical Specification

|                       |  |
|-----------------------|--|
| <b>Voltage</b>        | 9 - 60Vdc                                |
| <b>Current</b>        | 4mA Low 8mA High                         |
| <b>Sound Output</b>   | 100dB(A) Typical                         |
| <b>Tones</b>          | 7 user selectable + no tone option       |
| <b>Volume Control</b> | 10dB                                     |
| <b>Monitoring</b>     | Reverse polarity                         |
| <b>Temperature</b>    | - 10°C to +55°C<br>- 25°C to +70°C (W/P) |
| <b>Protection</b>     | IP21C, IP33C (W/P)                       |
| <b>Construction</b>   | ABS                                      |
| <b>Weight</b>         | 0.21Kg, 0.32Kg (W/P)                     |
| <b>Colours</b>        | Red or white                             |

### Dimensions

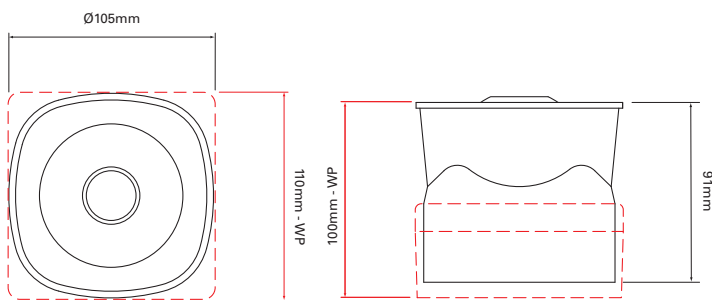

Symphoni Sounder White



### Catalogue Numbers

| Reference           | Cat No           | Description                   |
|---------------------|------------------|-------------------------------|
| SYV/R/V+ VP001ASY   | 680003FULL-0003X | Symphoni Voice Sounder, Red   |
| SYV/W1/V+ VP0001ASY | 680004FULL-0004X | Symphoni Voice Sounder, White |