# 9448 Wired 7 zone control panel

#### 9448EUR-90





#### Easy to install, saving you time and money

Simple wiring configuration. Easy to programme.

### Upgradeable to a communicating system for extra security

Option to add SD1, TSD2 and SD-GSM speech dialler to create a communicating system.

#### Easy to operate

Each system has full and part set facilities, the ability to change access codes and optional remote keypads to give a high level of security and total peace of mind.

## **Designed to offer exceptional value for money** Ideal choice for low security risk applications.

#### At a glance...


- Six zones plus One dedicated entry/exit zone
- Global tamper
- Bell, strobe and one programmable output
- · Ten event log
- · Day system status LED
- · Communication output



### Scantronic product data sheet

#### **Product specification**

Product code	9448EUR-90	9448EUR-95
Description	7 zone wired panel, ungraded	Panel and KP kit 7 Zone, ungraded
Wired external sounders		1
Event log	10	
Power supply	500mA	
Number of wired keypads	2	
Connection	Wired	
Operating temperature (°C)	-10°C to +55°C	
Display	10 LED indicators on the control panel, including day (unset) LED	
Outputs	Bell and strobe 500mA open collector. 1 programmable 100mA as PIR set latch or shock sensor reset	
Dimensions	Control panel (H x W x D): 212 x 212 x 68mm	Control panel (H x W x D): 212 x 212 x 68mm. Keypad (H x W x D): 120 x 100 x 28mm

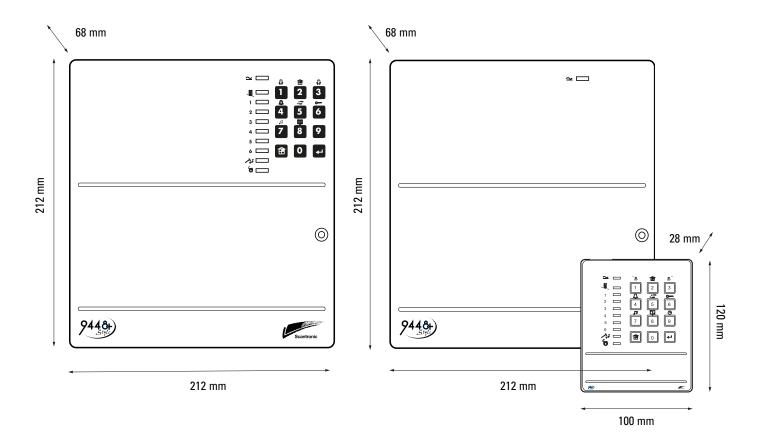

Compare product compatibility with our easy to read chart: www.eaton.com/security-works-with



**Eaton**Electrical Sector
EMEA Route de la Longeraie 7
1110 Morges, Switzerland

Tel: +44 (0)1594 545 400