

Eaton's Wiring Devices
Occupancy & vacancy sensors

Residential Occupancy & Vacancy Sensors

Simple and affordable solutions
for energy savings and convenience

EATON

Powering Business Worldwide

Eaton's residential occupancy & vacancy sensors

One of the most comprehensive sensor offerings in the market that provides consistent performance resulting in optimal energy savings and convenience.



Features & benefits




Utilizes Passive Infrared (PIR) technology with tamper-resistant, color-matched lens

Integrated daylight sensors allow the lights to stay OFF when sufficient natural light is present (occupancy models only)

User-selectable time delay behind manual ON/OFF button




Which should you choose?



Occupancy Sensors
Auto ON/Auto OFF

Occupancy Sensors automatically turn lights ON when the sensor detects the presence of a person and will automatically turn lights OFF when no presence is detected for a specified amount of time. These sensors are great for rooms that are often entered while carrying things or where the switch location may be inconvenient. Laundry rooms, storage rooms and garages are excellent examples.



Vacancy Sensors
Manual ON/Auto OFF

Vacancy Sensors require someone to manually turn ON the lights when required. The sensor will then automatically turn lights OFF when no presence is detected for a specified amount of time. These sensors ensure the highest level of energy savings since the lights will never automatically turn ON. **These sensors also meet residential requirements for California Title 24.**

Occupancy & vacancy sensors

Motion sensors - OS306U

Entry level occupancy and vacancy sensors are ideal for retrofit applications or new home construction.

- Can be used in single pole and 3-way applications
- Compatible with all common lighting loads including LED and CFL
- No neutral required for installation
- Optional neutral available for new construction



OS306U-W

Motion sensors with nightlight - OS310U

Switches with integrated nightlights are ideal for most rooms with a dimmable light level, selectable ON/OFF and operation independent of the sensing function.

- Fully dimmable nightlight provides safety and convenience
- Occupancy sensor models are selectable as Auto ON or Manual ON
- “Bedroom” mode keeps lights from turning ON during the night when the nightlight is ON
- Compatible with all common lighting loads including LED and CFL
- Color change kits available
- Neutral required for installation




OS310U-W

Dimming motion sensors - OS106D1 & OSUL106D

Entry level occupancy and vacancy dimmer sensors are ideal for retrofit applications or new home construction.

- Dimming preset allows lights to automatically return to your favorite setting
- Occupancy sensor models are selectable as Auto ON or Manual ON
- Color change kits available
- Neutral required for installation

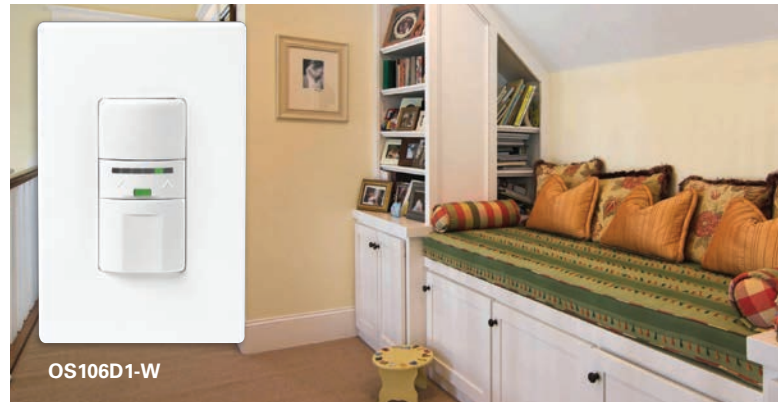

OS106D1-W

Dual switch sensors - OS310R

Dual relay sensors are the perfect solution for single point control of two loads from one location, offering even more energy saving opportunities and flexibility than ever.

- Fully dimmable nightlight provides safety and convenience
- Dual switch model controls two independent loads in one convenient product
- Color change kits available
- Neutral required for installation



OS310R-W

Screwless wallplates sold separately

Occupancy & vacancy sensors

Motion sensors

Product description

Single pole & 3-way
600W/VA, 120V/AC
LED, CFL, FLR, INC/HAL, ELV, MLV

Design features

- Can be wired as a single pole or 3-way device
- Passive infrared technology
- Sensors provide up to 180 degree field of view and 450 sq. ft. of major motion coverage
- Works with all popular load types: LED, CFL, fluorescent, incandescent/halogen, electronic low-voltage and magnetic low-voltage
- Selectable time delay of 5 seconds to 30 minutes for OS306U, 5 seconds to 20 minutes for VS306U for lights to remain on after room is vacated
- Occupancy sensor provides a selectable ambient light override preventing lights from switching ON when there is acceptable natural light
- Compact housing fits easily into a standard wall box and is suitable for multi-gang installations
- Compatible with decorator-style wallplates and screwless wallplates
- High-gloss finish complements any decor
- Electrostatic discharge protection
- No leakage to load in OFF mode
- Replaces a standard light or fan switch
- No neutral required for installation of device
- Optional neutral available for new construction
- Available with color change kits
- Title 24 compliant (Only VS306U)



VS306U

Motion sensors




Rating		Description	Compatible lamp loads	Color suffix	Catalog no.	TITLE 24
W/VA	V/AC					
600	120	Occupancy sensor switch, single pole/3-way, auto ON	LED, CFL, FLR, INC/HAL, ELV, MLV	BK, GY, LA, V, W, C2, C7	<input type="checkbox"/> OS306U-__	
		Vacancy sensor switch, single pole/3-way, manual ON	LED, CFL, FLR, NC/HAL, ELV, ML	BK, GY, LA, V, W, C2, C7	<input type="checkbox"/> VS306U-__	•

Note: Sensors are rated for 120V/AC unless otherwise noted. cULus Listed to UL773A, file no. E191639

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White), C2 (Color Change Kit: LA, W, V), C7 (Color Change Kit: B, BK, GY)

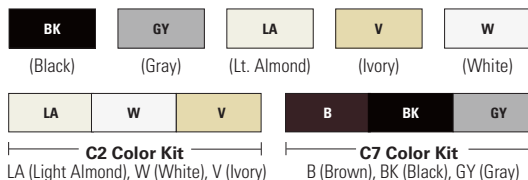

Compliances, specifications and availability are subject to change without notice.

Indicates Title 24 compliant

Occupancy & vacancy sensors

Motion sensors

Product description

Single pole & 3-way
1000W/VA, 120V/AC; 1/6 HP Motor
LED, CFL, FLR, INC/HAL, ELV, MLV




VS310U

Design features

- Can be wired as a single pole or 3-way device
- Selectable ON/OFF LED nightlight with press and hold dimming function
- Works with all popular load types: LED, CFL, fluorescent, incandescent/halogen, electronic low-voltage and magnetic low-voltage
- Green LED indicates load status, provides locator light in dark and blinks to indicate motion detection
- Provides 180 degree field of view and 1000 sq. ft. of major motion coverage
- Provides 3-way operation when used with a 3-way switch or sensor
- Selectable time delay of 5 seconds (test), 5 minutes, 10 minutes and 20 minutes for lights to remain ON after room is vacated
- Occupancy sensor provides a selectable ambient light override preventing lights from switching ON when there is acceptable natural light
- Occupancy sensor version allows toggling between Auto ON/Auto OFF or Manual ON /Auto OFF mode with a simple press and hold of switch
- Occupancy sensor provides for a bypass feature to allow the sensor to perform as a traditional switch (Manual ON/Manual OFF)
- Electrostatic discharge protection
- Color change faceplate kits provide for a simple in field change
- Replaces a standard light or fan switch
- Neutral required for installation of device
- Mid-size decorator wallplate included with product
- Title 24 compliant

Motion sensors

Rating W/VA	V/AC	HP Motor	Description	Compatible lamploads	Color suffix	Catalog no.	
1000	120	1/6	Occupancy sensor switch with nightlight, single pole/3-way	LED, CFL, FLR, INC/HAL, ELV, MLV	BK, GY, LA, V, W	<input type="checkbox"/> OS310U-__	•
			Vacancy sensor switch with nightlight, single pole/3-way	LED, CFL, FLR, INC/HAL, ELV, MLV	BK, GY, LA, W	<input type="checkbox"/> VS310U-__	•

cULus Listed to UL244A, file no. E325082; NOM certified

Motion sensor color change kits

Description	Color suffix	Catalog no.
Color change kit for motion sensor	BK, GY, LA, V, W	<input type="checkbox"/> SCK1-__BP

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



Compliances, specifications and availability are subject to change without notice.

 Indicates Title 24 compliant

Occupancy & vacancy sensors

Dimming motion sensors

Product description

Single pole
600W/VA; 120V/AC
INC/HAL, MLV

Design features

- Full-range preset dimming control provided with horizontal DIM/BRIGHT bar
- Digital circuitry provides aesthetically pleasing soft ON/fade OFF that extends bulb life
- Preset and light level change is easily shown with horizontal row of green LEDs
- Works with popular load types: incandescent/halogen and magnetic low-voltage
- Green LED indicates load status, provides locator light in dark and blinks to indicate motion detection
- LED serves as air-gap switch disconnecting power from load, forcing an OFF condition
- Provides 180 degree field of view and 1000 sq. ft. of major motion coverage
- Selectable time delay of 5 seconds (test), 5 minutes, 15 minutes and 30 minutes for lights to remain ON after room is vacated
- Reverse mode allows light to stay OFF in a room when motion is detected
- Occupancy sensor provides a selectable ambient light override preventing lights from switching ON when there is acceptable natural light
- Occupancy sensor version allows toggling between Auto ON/Auto OFF or Manual ON /Auto OFF mode with a simple press and hold of switch
- Occupancy sensor provides for a bypass feature to allow the sensor to perform as a traditional switch (Manual ON/Manual OFF)
- Electrostatic discharge protection
- No leakage to load in OFF mode
- Color change faceplate kits provide for a simple in field change
- Replaces a standard light switch
- Neutral required for installation of device
- Mid-size decorator wallplate included with product



OS106D1

Dimming motion sensors



Rating		Description		Color suffix	Catalog no.
W/VA	V/AC				
600	120	Occupancy dimmer sensor, single pole	INC/HAL, MLV	BK, GY, LA, V, W, C2	<input type="checkbox"/> OS106D1-__
		Vacancy dimmer sensor, single pole	INC/HAL, MLV	BK, GY, LA, V, W, C2	<input type="checkbox"/> VS106D1-__


cULus Listed to UL244A & UL1472, file no. E325082; NOM certified

Dimmer color change kits

Description	Color suffix	Catalog no.
Color change kit for dimmer sensor	BK, GY, LA, V, W	<input type="checkbox"/> SCKD-__-BP

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



C2 Color Kit
LA (Light Almond), W (White), V (Ivory)

Compliances, specifications and availability are subject to change without notice.



Indicates Title 24 compliant

Occupancy & vacancy sensors

Universal dimmer sensors

Product description

Single pole & 3-way
 INC/HAL/ELV/MLV, 600W, 120V/AC
 LED/CFL/Fluorescent; 300W 120V/AC

Design features

- Soft ON/fade OFF
- Preset and light level change is easily shown with horizontal row of green LEDs
- Convenient patented built-in wire strippers allow for fast installation
- Single green LED indicates load status and motion detection
- Provides 180 degree field of view and 1000 sq. ft. of major motion coverage
- Selectable time delay of 5 seconds (test), 5 minutes, 10 minutes and 20 minutes for lights to remain ON after room is vacated
- Occupancy Sensors time delay default set to 5 minutes; Vacancy Sensors time delay default set to 20 minutes
- Occupancy Sensor provides a selectable ambient light override preventing lights from switching ON when there is acceptable natural light
- Occupancy Sensor allows to toggle between Auto ON/Auto OFF or Manual ON/Auto OFF mode with a simple press and hold of switch
- Occupancy Sensor provides for a bypass feature to allow the sensor to perform as a traditional switch (Manual ON/Manual OFF)
- Electrostatic discharge protection
- No leakage to load in OFF mode
- Color change faceplate kits provide for a simple in field change
- Neutral required for installation of device
- Title 24 compliant



OSUL06D



VSUL06D

Occupancy & vacancy sensor dimmers



Rating		Description	Color suffix	Catalog no.	TITLE 24 COMPLIANT
W/VA	V/AC				
600	120	Motion sensor with dimmer	C2, C4, C7	<input type="checkbox"/> OSUL06D-__	•
		Vacancy sensor with dimmer	C2, C4, C5, C7	<input type="checkbox"/> VSUL06D-__	•

Color Ordering Information

For ordering devices, include Catalog no. followed by the color suffix: C2 (Color Change Kit: LA, W, V), C4 (Color Change Kit: BK, W, V), C5 (Color Change Kit: W, BK, GY), C7 Color Change Kit: B, BK, GY)

LA	W	V	BK	W	V	W	BK	GY	B	BK	GY
C2 Color Kit			C4 Color Kit			C5 Color Kit			C7 Color Kit		
LA (Light Almond), W (White), V (Ivory)			BK (Black), W (White), V (Ivory)			W (White), BK (Black), GY (Gray)			B (Brown), BK (Black), GY (Gray)		

Compliances, specifications and availability are subject to change without notice.

Indicates Title 24 compliant

Occupancy & vacancy sensors

Dual relay motion sensors

Product description

Single pole & 3-way
1000W/VA, 120V/AC; 1/6 HP Motor
LED, CFL, FLR, INC/HAL, ELV, MLV


Design features

- Can be wired as a single pole or 3-way device
- Selectable ON/OFF LED nightlight with press and hold dimming function
- Works with all popular load types: LED, CFL, fluorescent, incandescent/halogen, electronic low-voltage and magnetic low-voltage
- Contains two switches to control two independent lighting loads or circuits (light and/or fan)
- Green LED indicates load status, provides locator light in dark and blinks to indicate motion detection
- Provides 180 degree field of view and 1000 sq. ft. of major motion coverage
- Provides 3-way operation when used with a 3-way switch or sensor
- Selectable time delay of 5 seconds (test), 5 minutes, 10 minutes and 20 minutes for lights to remain ON after room is vacated
- Reverse mode allows light to stay OFF in a room when motion is detected
- Occupancy sensor provides a selectable ambient light override preventing lights from switching ON when there is acceptable natural light
- Occupancy sensor version allows toggling between Auto ON/Auto OFF or Manual ON/Auto OFF mode with a simple press and hold of switch
- Occupancy sensor provides for a bypass feature to allow the sensor to perform as a traditional switch (Manual ON/Manual OFF)
- Color change faceplate kits provide for a simple in field change
- Replaces a standard light or fan switch
- Neutral required for installation of device
- Mid-size decorator wallplate included with product
- Title 24 compliant



OS310R

Dual relay motion sensors

Rating W/VA	HP V/AC	Motor	Description		Color suffix	Catalog no.	
1000	120	1/6	Occupancy sensor dual switch with dimmable nightlight, single pole/3-way	LED, CFL, FLR, INC/HAL, ELV, MLV	BK, GY, LA, V, W	<input type="checkbox"/> OS310R-__	•
			Vacancy sensor dual switch with dimmable nightlight, single pole/3-way	LED, CFL, FLR, INC/HAL, ELV, MLV	BK, GY, LA, V, W	<input type="checkbox"/> VS310R-__	•

cULus Listed to UL244A, file no. E325082; NOM certified

Dual-relay motion sensor color change kit

Description	Color suffix	Catalog no.
Color change kit for dual relay motion sensor	BK, GY, LA, V, W	<input type="checkbox"/> SCKR-__-BP

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



Compliances, specifications and availability are subject to change without notice.

 Indicates Title 24 compliant

We make what matters work.*

* At Eaton, we believe that power is a fundamental part of just about everything people do. Technology, transportation, energy and infrastructure-these are things the world relies on every day. That's why Eaton is dedicated to helping our customers find new ways to manage electrical, hydraulic and mechanical power more efficiently, safely and sustainably. To improve people's lives, the communities where we live and work, and the planet our future generations depend upon. Because that's what really matters. And we're here to make sure it works.

See more at Eaton.com/whatmatters

Visit our website:
www.eaton.com/wiringdevices

Electrical Sector
203 Cooper Circle
Peachtree City, GA 30269
United States
Eaton.com
Eaton.com/wiringdevices

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2021 Eaton
All Rights Reserved
Printed in USA
Publication No. BR610071EN
September 2021

Electrical Sector
Canada Operations
5925 McLaughlin Road
Mississauga, Ontario, L5R 1B8
Canada
EatonCanada.ca
Eaton.com/wiringdevices

Electrical Sector
Mexico Operations -
Carr. Tlalnepantla -
Cuautitlan Km 17.8 s/n
Col. Villa Jardin esq.
Cerrada 8 de Mayo
Cuautitlan, Mexico CP 54800
Mexico
Eaton.mx
Eaton.com/wiringdevices