


HCM1305

High current power inductors

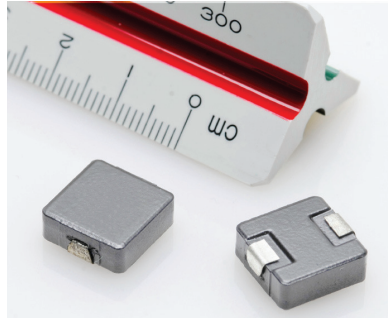

Product features

- High current carrying capacity
- Low core losses
- Magnetically shielded, low EMI
- Frequency range up to 5 MHz
- Inductance range from 0.10 μ H to 33 μ H
- Current range from 5.2 A to 118 A
- 13.8 mm x 12.5 mm footprint surface mount package in a 5.0 mm height
- Iron powder core material

Applications

- Voltage Regulator Module (VRM)
- Multi-phase regulators
- Point-of-load modules
- Desktop and server VRMs and EVRDs
- Base station equipment
- Notebook and laptop regulators
- Battery power systems
- Graphics cards
- Data networking and storage systems

Environmental data

- Storage temperature range (component): -55 °C to +125 °C
- Operating temperature range: -55 °C to +125 °C (ambient plus self-temperature rise)
- Solder reflow temperature: J-STD-020 (latest revision) compliant




Product specifications

| Part Number ⁶ | OCL ¹ (μH) \pm 20% | FLL ² Min. (μH) | I_{rms}^3 (A) | I_{sat}^4 (A) | DCR (m Ω) @ +20 °C \pm nominal | DCR (m Ω) @ +20 °C maximum | K-factor ⁵ |
|--------------------------|---|--|---------------------------|---------------------------|--|--|-----------------------|
| HCM1305-R10-R | 0.10 | 0.064 | 55 | 118 | 0.52 | 0.59 | 848 |
| HCM1305-R22-R | 0.22 | 0.14 | 51 | 110 | 0.63 | 0.72 | 843 |
| HCM1305-R33-R | 0.33 | 0.21 | 42 | 80 | 0.80 | 0.92 | 506 |
| HCM1305-R47-R | 0.47 | 0.30 | 38 | 65 | 0.80 | 0.92 | 506 |
| HCM1305-R56-R | 0.56 | 0.36 | 36 | 55 | 1.15 | 1.33 | 500 |
| HCM1305-R68-R | 0.68 | 0.44 | 34 | 54 | 1.15 | 1.33 | 500 |
| HCM1305-R82-R | 0.82 | 0.52 | 31 | 53 | 1.40 | 1.61 | 358 |
| HCM1305-1R0-R | 1.00 | 0.64 | 29 | 50 | 2.10 | 2.42 | 275 |
| HCM1305-1R5-R | 1.50 | 0.96 | 23 | 48 | 2.75 | 3.16 | 225 |
| HCM1305-1R8-R | 1.80 | 1.15 | 21 | 40 | 4.00 | 4.60 | 216 |
| HCM1305-2R2-R | 2.20 | 1.41 | 20 | 32 | 4.60 | 5.29 | 191 |
| HCM1305-3R3-R | 3.30 | 2.11 | 15 | 32 | 7.70 | 9.20 | 170 |
| HCM1305-4R7-R | 4.70 | 3.01 | 12 | 27 | 11.0 | 12.7 | 161 |
| HCM1305-5R6-R | 5.60 | 3.58 | 11.5 | 22 | 12.0 | 13.8 | 142 |
| HCM1305-6R8-R | 6.80 | 4.35 | 11 | 21 | 13.0 | 15.0 | 129 |
| HCM1305-7R8-R | 7.80 | 4.99 | 10 | 18.5 | 16.8 | 19.4 | 117 |
| HCM1305-8R2-R | 8.20 | 5.25 | 9.5 | 18 | 17.5 | 20.1 | 117 |
| HCM1305-100-R | 10.0 | 6.40 | 9.0 | 16 | 19.0 | 21.9 | 90 |
| HCM1305-150-R | 15.0 | 9.60 | 7.7 | 13 | 29.0 | 33.4 | 74 |
| HCM1305-220-R | 22.0 | 14.1 | 6.2 | 10 | 45.0 | 51.8 | 63 |
| HCM1305-330-R | 33.0 | 21.1 | 5.2 | 8 | 74.5 | 85.5 | 48 |

1. Open Circuit Inductance (OCL) Test Parameters: 100 kHz, 0.25 V_{rms} , 0.0 Adc, +25 °C.
2. Full Load Inductance (FLL) Test Parameters: 100 kHz, 0.25 V_{rms} , I_{sat} @ +25 °C.
3. I_{rms} : DC current for an approximate temperature rise of 40 °C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed +125 °C under worst case operating conditions verified in the end application.

4. I_{sat} : Peak current for approximately 20% rolloff at +25 °C.
5. K-factor: Used to determine B_{pp} for core loss (see graph). $B_{\text{pp}} = K * L * \Delta I$.
 B_{pp} : (Gauss), K: (K-factor from table), L: (Inductance in μH), ΔI (Peak to peak ripple current in amps).
6. Part Number Definition: HCM1305-yyy-R
- HCM1305 = Product code and size
yyy= Inductance value in μH , R = decimal point,
if no R is present then third character = number of zeros.
“-R” suffix = RoHS compliant

Dimensions- mm

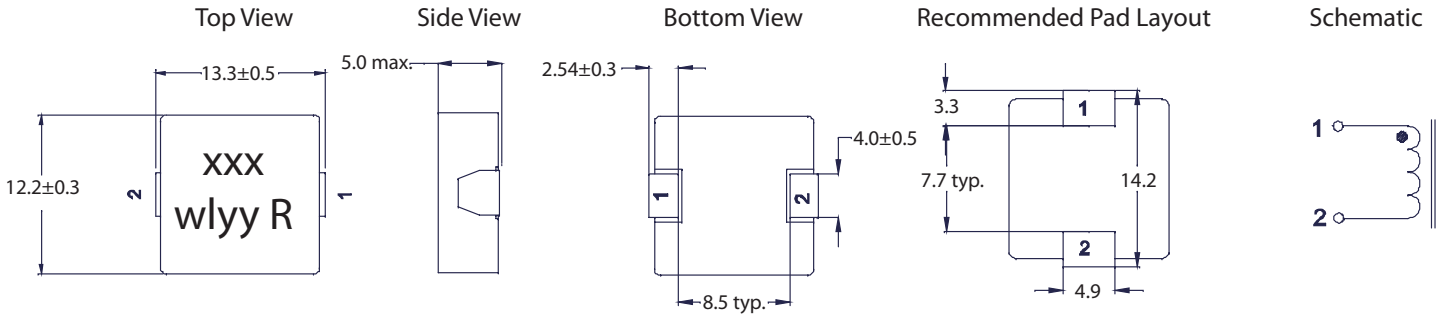

Part Marking: xxx = Inductance value in μH , R = decimal point, if no R is present, third character = number of zeros, wlyy = (Date Code), R = (Revision Level)


All soldering surfaces to be coplanar within 0.10 millimeters.

Tolerances are ± 0.3 millimeters unless stated otherwise.

Color: Grey.


Do not route traces or vias underneath the inductor

Packaging information - mm

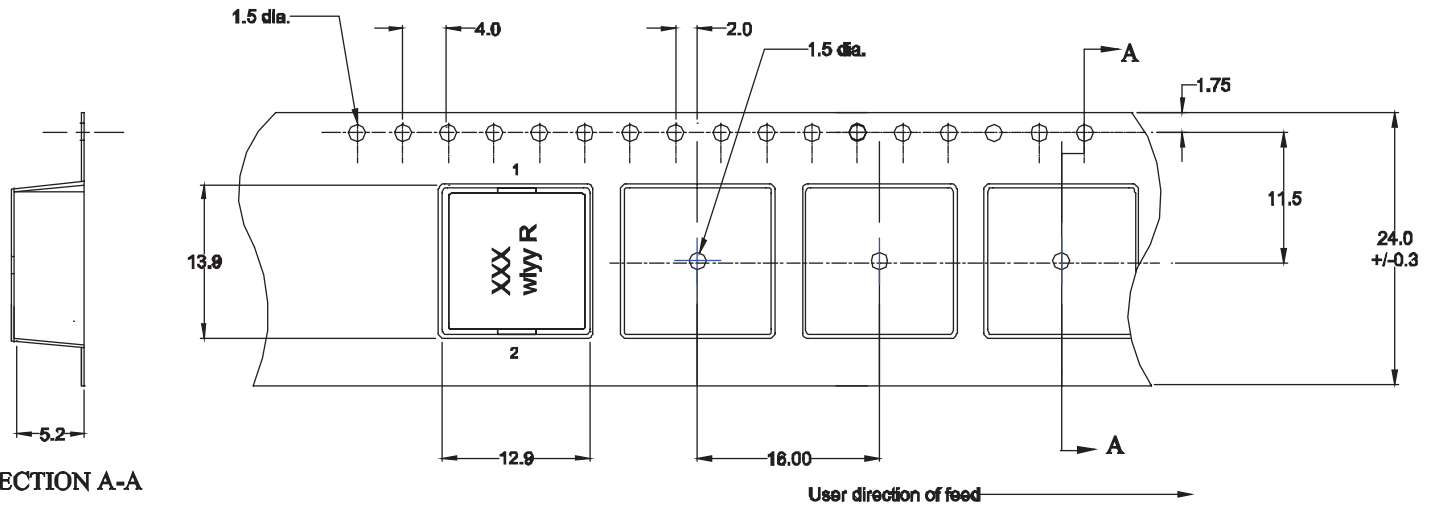


Supplied in tape and reel packaging, 400 parts per 13" diameter reel.







Temperature rise vs. total loss

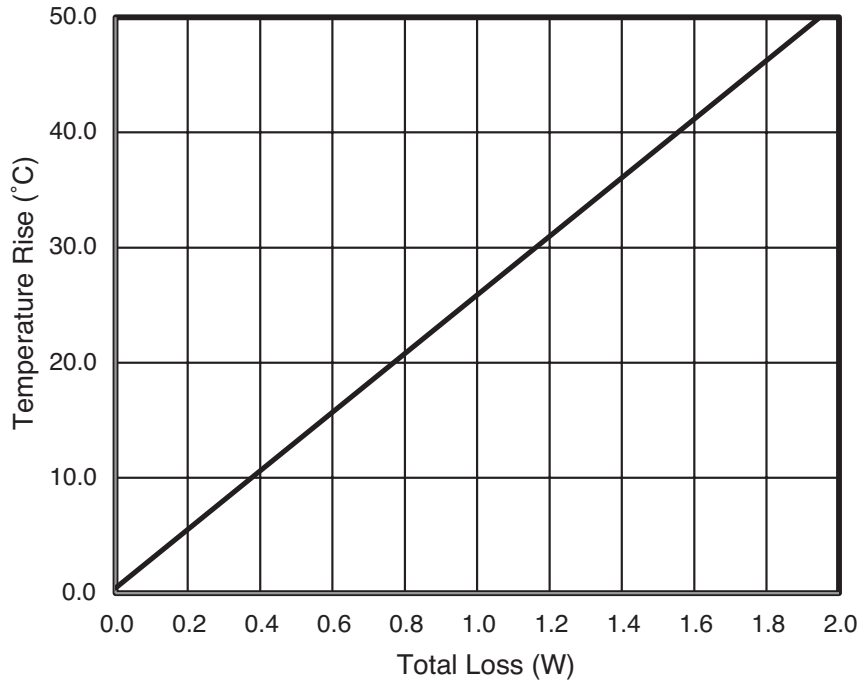







Core loss vs. B_{p-p}

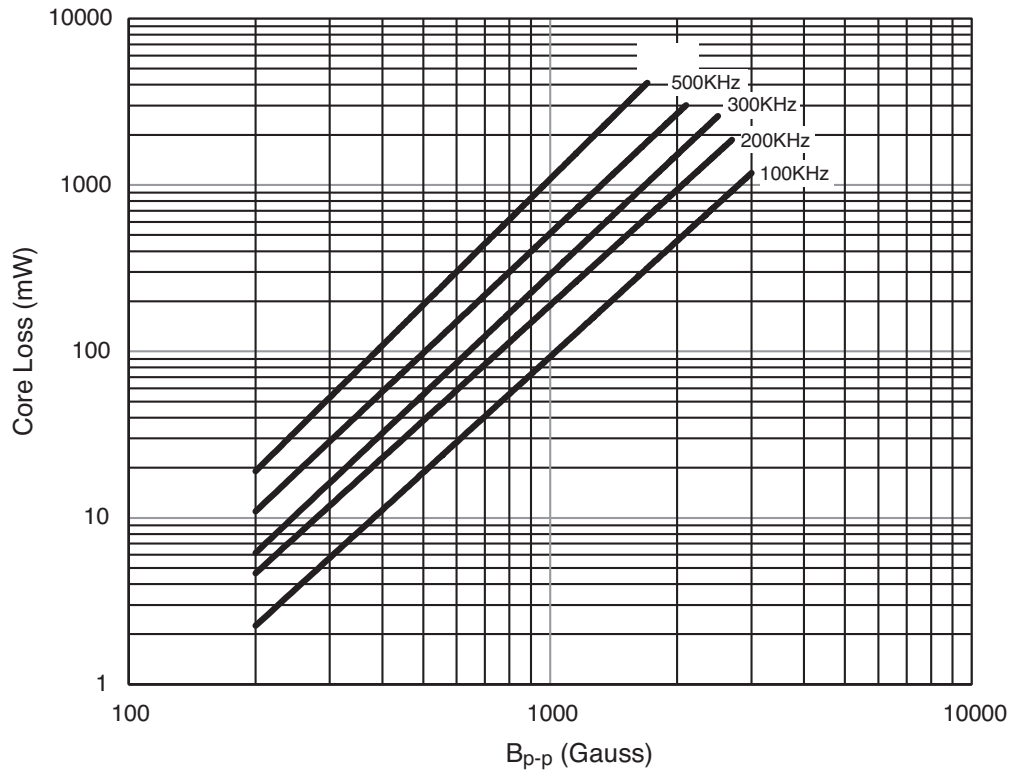







Inductance characteristics

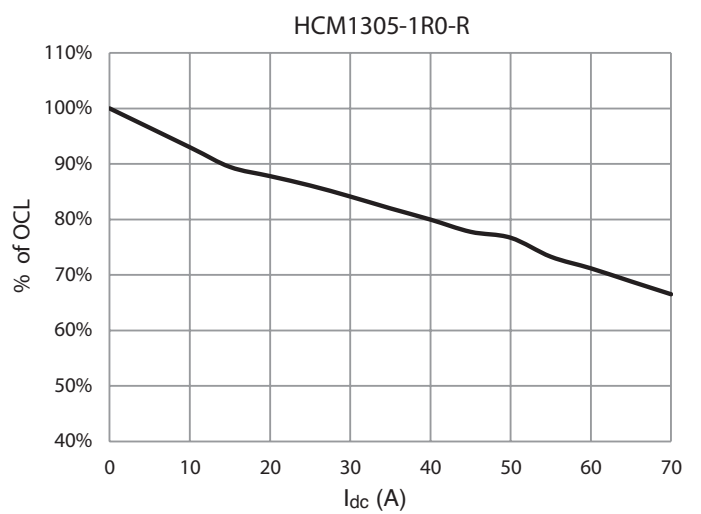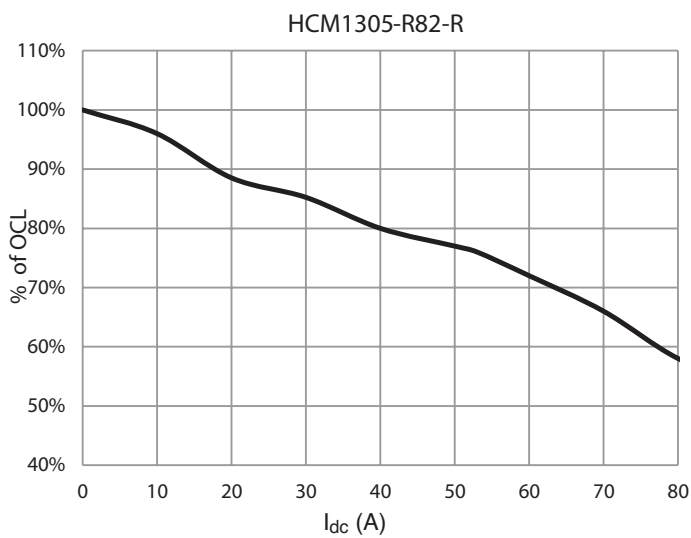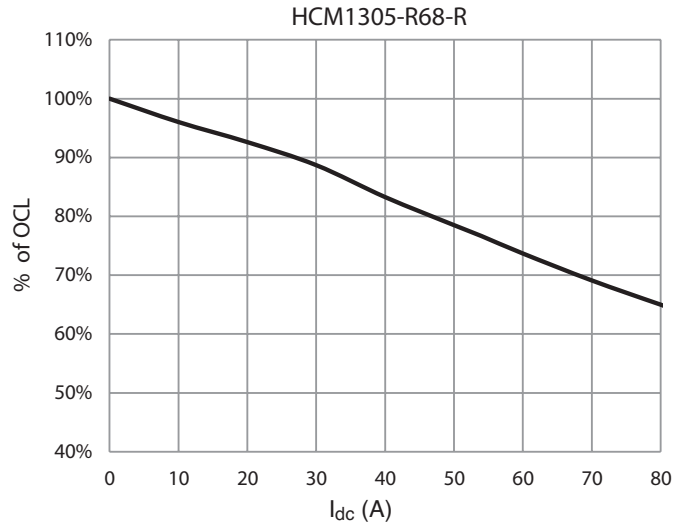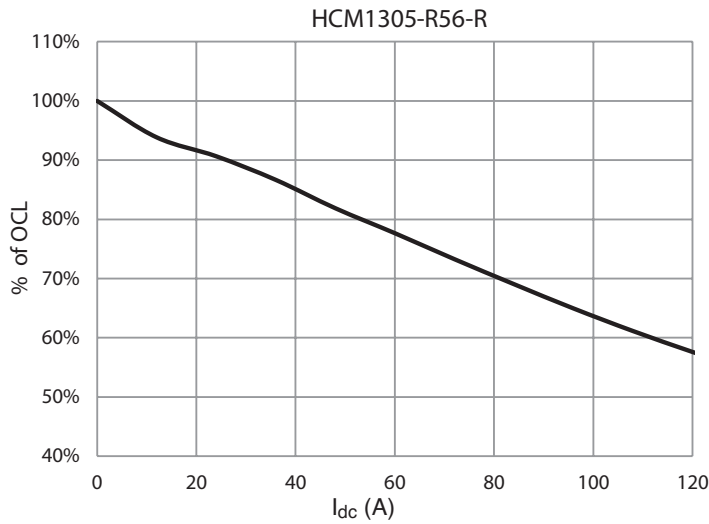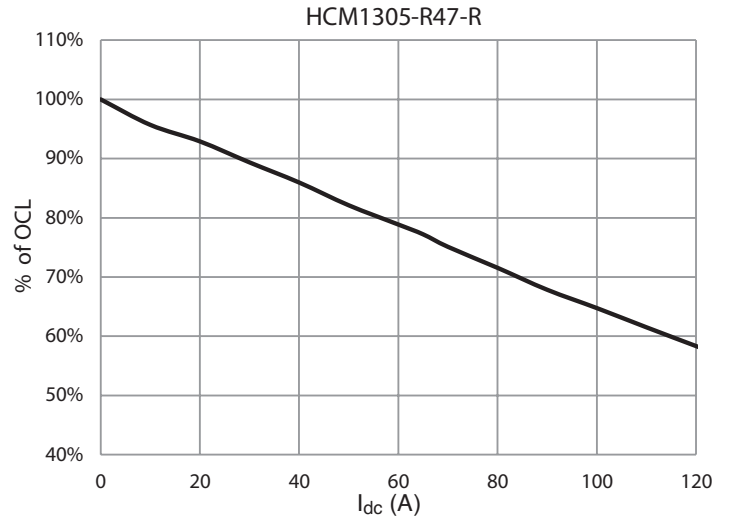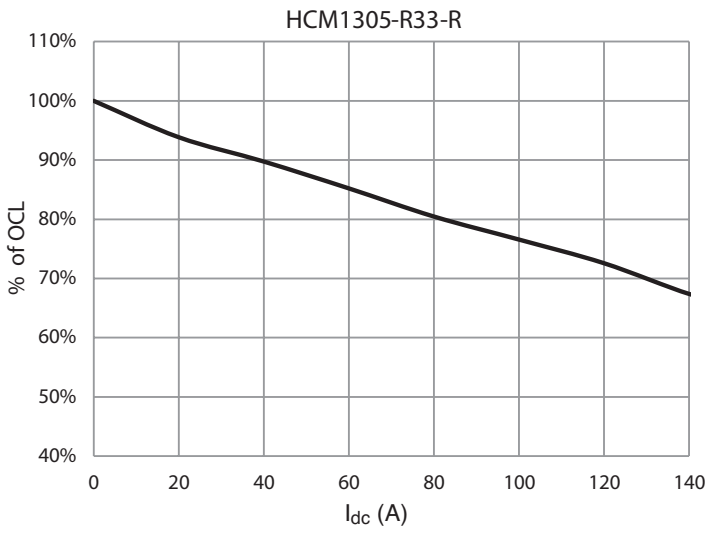


Inductance characteristics

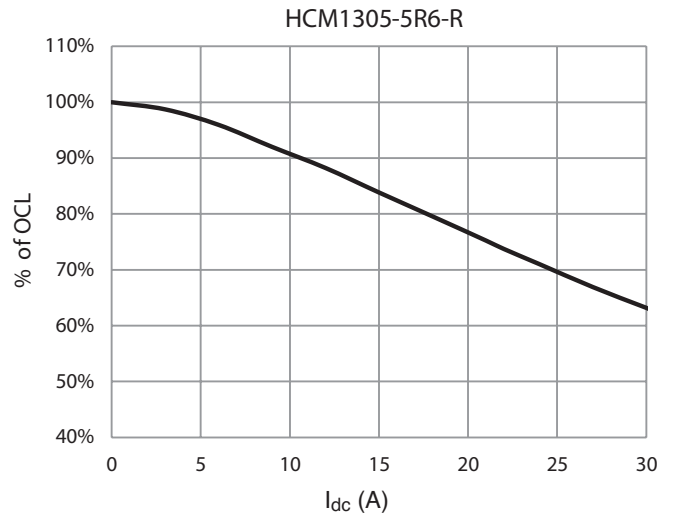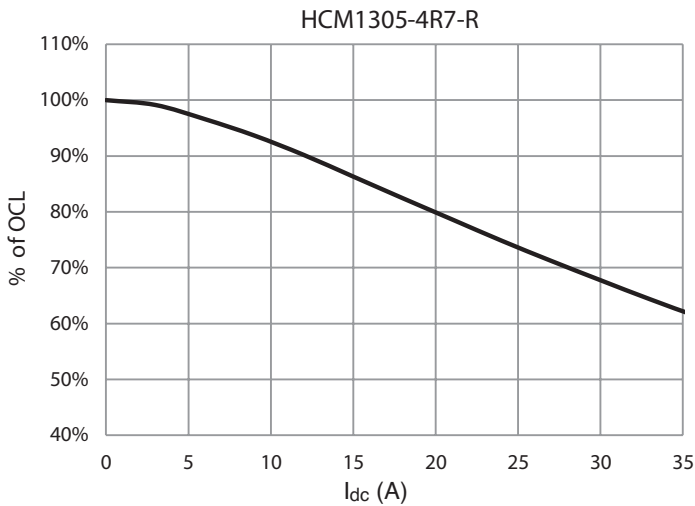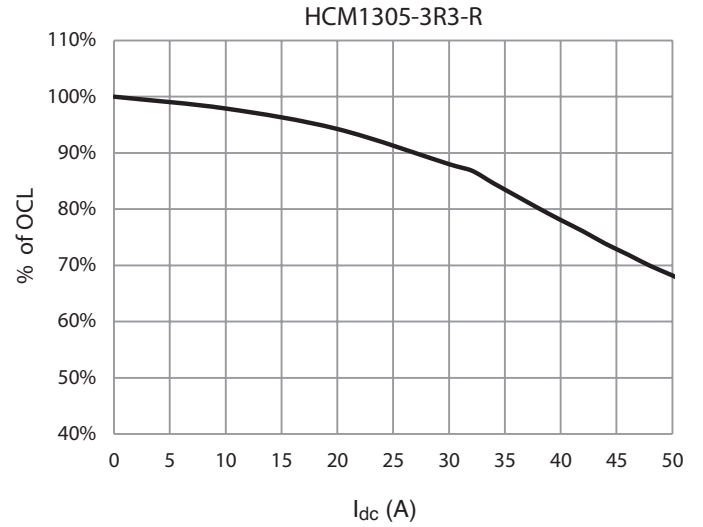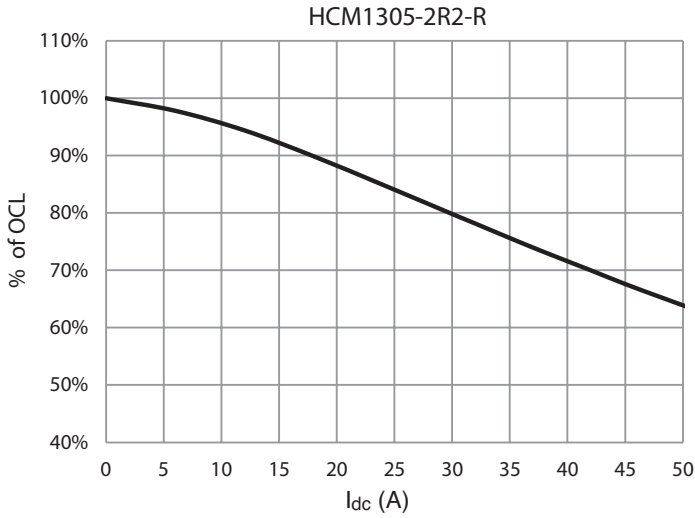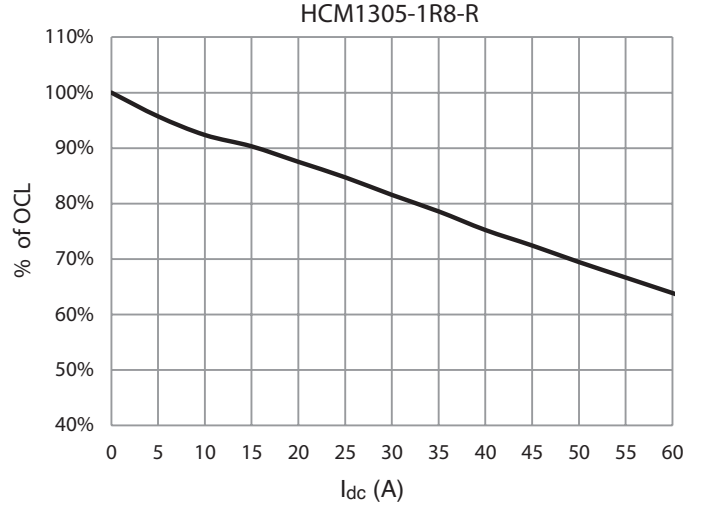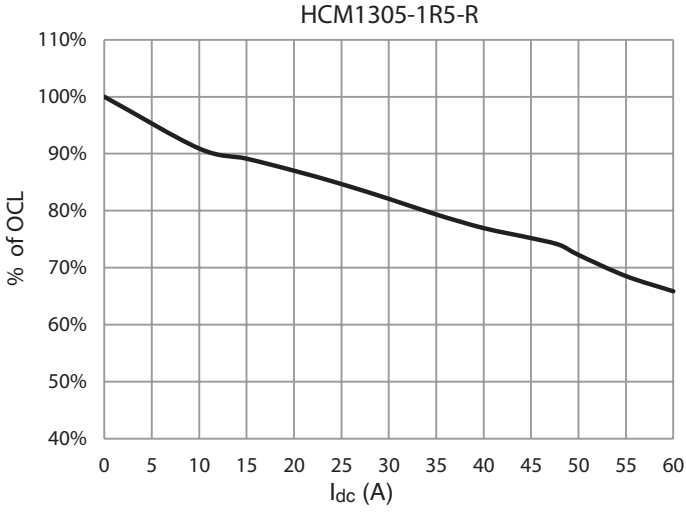

Inductance characteristics

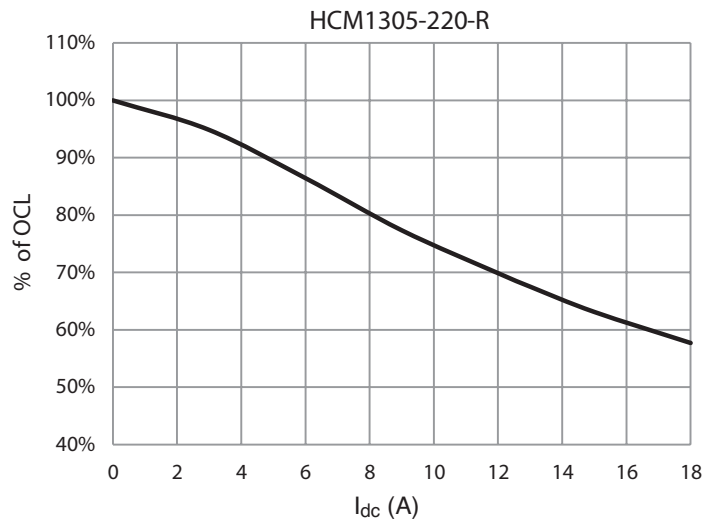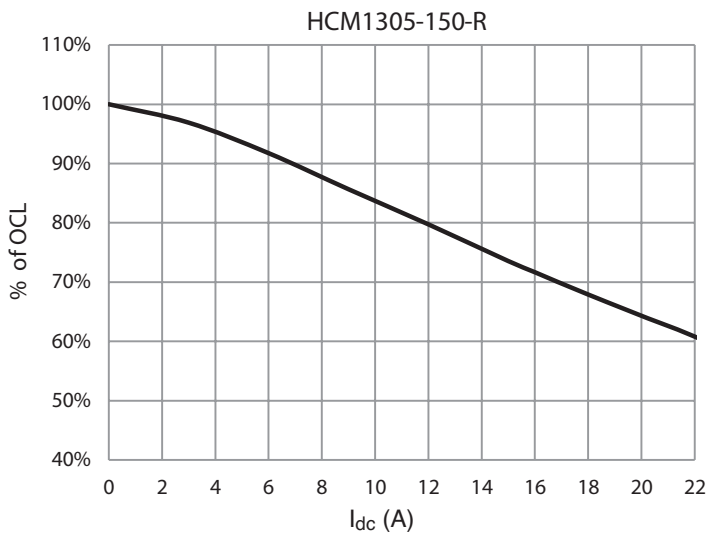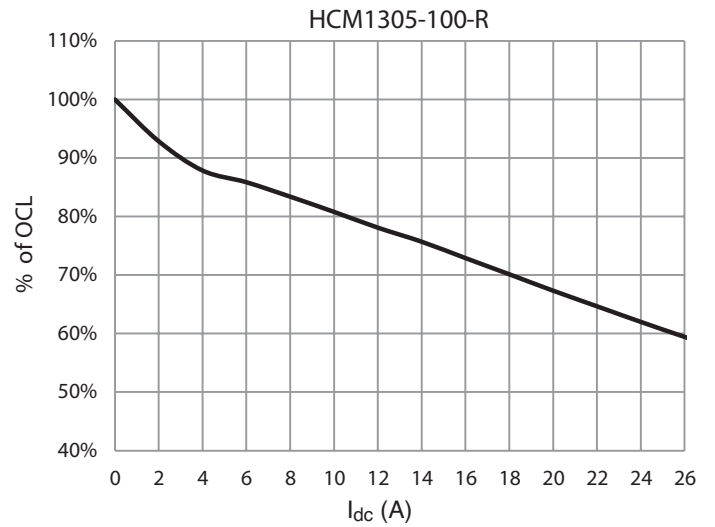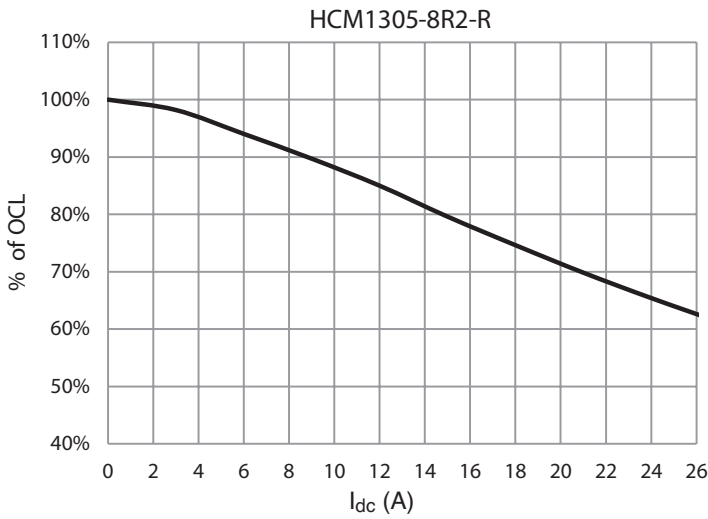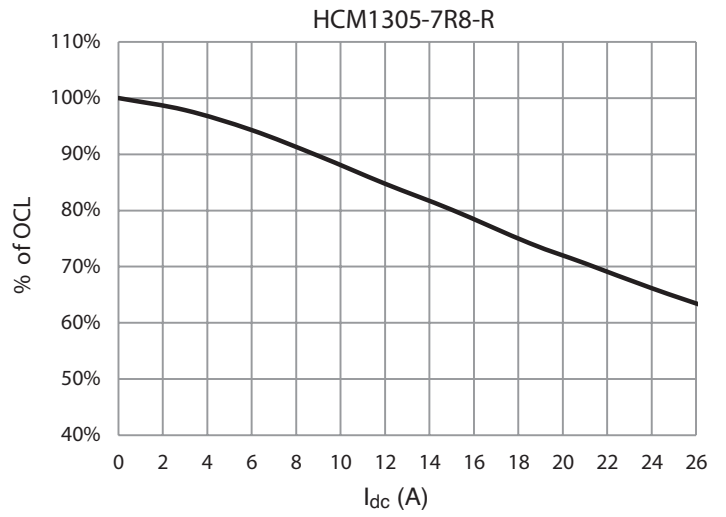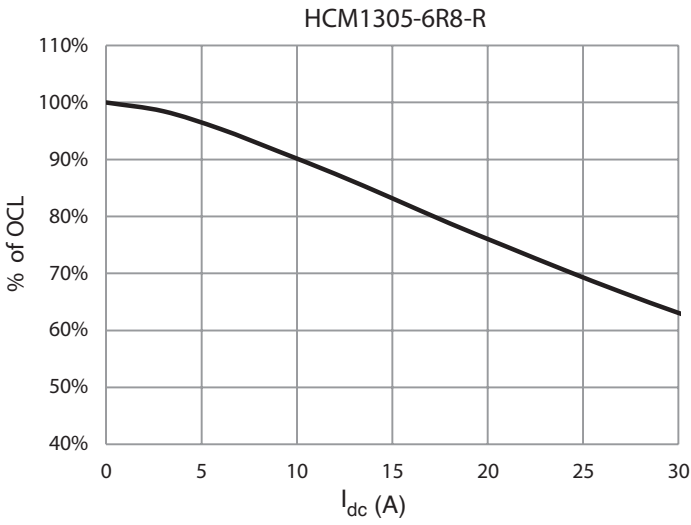

Inductance characteristics

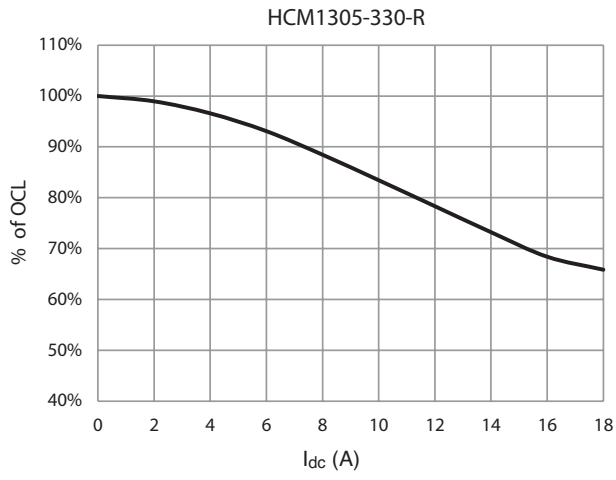

Solder Reflow Profile

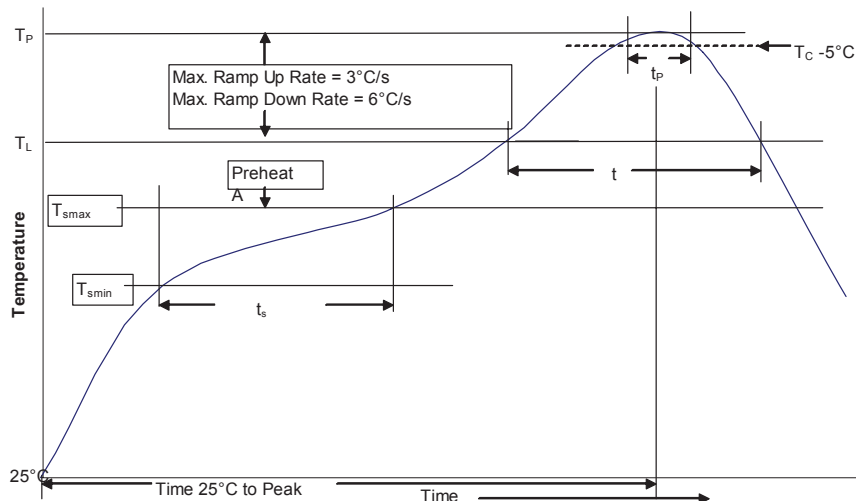


Table 1 - Standard SnPb Solder (T_c)

| Package Thickness | Volume mm^3 <350 | Volume mm^3 ≥ 350 |
|---------------------|---------------------------|---------------------------------|
| <2.5mm | 235°C | 220°C |
| $\geq 2.5\text{mm}$ | 220°C | 220°C |

Table 2 - Lead (Pb) Free Solder (T_c)

| Package Thickness | Volume mm^3 <350 | Volume mm^3 350 - 2000 | Volume mm^3 >2000 |
|-------------------|---------------------------|---------------------------------|----------------------------|
| <1.6mm | 260°C | 260°C | 260°C |
| 1.6 - 2.5mm | 260°C | 250°C | 245°C |
| >2.5mm | 250°C | 245°C | 245°C |

Reference JDEC J-STD-020

| Profile Feature | Standard SnPb Solder | Lead (Pb) Free Solder |
|--|----------------------|-----------------------|
| Preheat and Soak | | |
| • Temperature min. (T_{smin}) | 100°C | 150°C |
| • Temperature max. (T_{smax}) | 150°C | 200°C |
| • Time (T_{smin} to T_{smax}) (t_s) | 60-120 Seconds | 60-120 Seconds |
| Average ramp up rate T_{smax} to T_p | 3°C/ Second Max. | 3°C/ Second Max. |
| Liquidous temperature (T_L) | 183°C | 217°C |
| Time at liquidous (t_L) | 60-150 Seconds | 60-150 Seconds |
| Peak package body temperature (T_p)* | Table 1 | Table 2 |
| Time (t_p)** within 5 °C of the specified classification temperature (T_c) | 20 Seconds** | 30 Seconds** |
| Average ramp-down rate (T_p to T_{smax}) | 6°C/ Second Max. | 6°C/ Second Max. |
| Time 25°C to Peak Temperature | 6 Minutes Max. | 8 Minutes Max. |

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/electronics

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. 4371 BU-SB14459
September 2017